

**NORME PRC-024-1
(VERSION ANGLAISE)**

A. Introduction

1. **Title:** Generator Frequency and Voltage Protective Relay Settings
2. **Number:** PRC-024-1
3. **Purpose:** Ensure Generator Owners set their generator protective relays such that generating units remain connected during defined frequency and voltage excursions.
4. **Applicability:**
 - 4.1. Generator Owner
5. **Effective Date:**
 - 5.1. In those jurisdictions where regulatory approval is required:
 - 5.1.1 By the first day of the first calendar quarter, two calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified at least 40 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.1.2 By the first day of the first calendar quarter, three calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified at least 60 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.1.3 By the first day of the first calendar quarter, four calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified at least 80 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.1.4 By the first day of the first calendar quarter, five calendar years following applicable regulatory approval, or as otherwise made effective pursuant to the laws applicable to such ERO governmental authorities, each Generator Owner shall have verified 100 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.2. In those jurisdictions where regulatory approval is not required:
 - 5.2.1 By the first day of the first calendar quarter, two calendar years following Board of Trustees approval, each Generator Owner shall have verified at least 40 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
 - 5.2.2 By the first day of the first calendar quarter, three calendar years following Board of Trustees approval, each Generator Owner shall have verified at least 60 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.

- 5.2.3** By the first day of the first calendar quarter, four calendar years following Board of Trustees approval, each Generator Owner shall have verified at least 80 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.
- 5.2.4** By the first day of the first calendar quarter, five calendar years following Board of Trustees approval, each Generator Owner shall have verified 100 percent of its Facilities are fully compliant with Requirements R1, R2, R3, and R4.

B. Requirements

- R1.** Each Generator Owner that has generator frequency protective relaying¹ activated to trip its applicable generating unit(s) shall set its protective relaying such that the generator frequency protective relaying does not trip the applicable generating unit(s) within the “no trip zone” of PRC-024 Attachment 1, subject to the following exceptions: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- Generating unit(s) may trip if the protective functions (such as out-of-step functions or loss-of-field functions) operate due to an impending or actual loss of synchronism or, for asynchronous generating units, due to instability in power conversion control equipment.
 - Generating unit(s) may trip if clearing a system fault necessitates disconnecting (a) generating unit(s).
 - Generating unit(s) may trip within a portion of the “no trip zone” of PRC-024 Attachment 1 for documented and communicated regulatory or equipment limitations in accordance with Requirement R3.
- R2.** Each Generator Owner that has generator voltage protective relaying¹ activated to trip its applicable generating unit(s) shall set its protective relaying such that the generator voltage protective relaying does not trip the applicable generating unit(s) as a result of a voltage excursion (at the point of interconnection²) caused by an event on the transmission system external to the generating plant that remains within the “no trip zone” of PRC-024 Attachment 2. If the Transmission Planner allows less stringent voltage relay settings than those required to meet PRC-024 Attachment 2, then the Generator Owner shall set its protective relaying within the voltage recovery characteristics of a location-specific Transmission Planner’s study. Requirement R2 is subject to the following exceptions: *[Violation Risk Factor: Medium] [Time Horizon: Long-term Planning]*
- Generating unit(s) may trip in accordance with a Special Protection System (SPS) or Remedial Action Scheme (RAS).
 - Generating unit(s) may trip if clearing a system fault necessitates disconnecting (a) generating unit(s).
 - Generating unit(s) may trip by action of protective functions (such as out-of-step functions or loss-of-field functions) that operate due to an impending or actual loss of synchronism or, for asynchronous generating units, due to instability in power conversion control equipment.

¹ Each Generator Owner is not required to have frequency or voltage protective relaying (including but not limited to frequency and voltage protective functions for discrete relays, volts per hertz relays evaluated at nominal frequency, multi-function protective devices or protective functions within control systems that directly trip or provide tripping signals to the generator based on frequency or voltage inputs) installed or activated on its unit.

² For the purposes of this standard, point of interconnection means the transmission (high voltage) side of the generator step-up or collector transformer.

- Generating unit(s) may trip within a portion of the “no trip zone” of PRC-024 Attachment 2 for documented and communicated regulatory or equipment limitations in accordance with Requirement R3.
- R3.** Each Generator Owner shall document each known regulatory or equipment limitation³ that prevents an applicable generating unit with generator frequency or voltage protective relays from meeting the relay setting criteria in Requirements R1 or R2 including (but not limited to) study results, experience from an actual event, or manufacturer’s advice.
[Violation Risk Factor: Lower] [Time Horizon: Long-term Planning]
- 3.1.** The Generator Owner shall communicate the documented regulatory or equipment limitation, or the removal of a previously documented regulatory or equipment limitation, to its Planning Coordinator and Transmission Planner within 30 calendar days of any of the following:
- Identification of a regulatory or equipment limitation.
 - Repair of the equipment causing the limitation that removes the limitation.
 - Replacement of the equipment causing the limitation with equipment that removes the limitation.
 - Creation or adjustment of an equipment limitation caused by consumption of the cumulative turbine life-time frequency excursion allowance.
- R4.** Each Generator Owner shall provide its applicable generator protection trip settings associated with Requirements R1 and R2 to the Planning Coordinator or Transmission Planner that models the associated unit within 60 calendar days of receipt of a written request for the data and within 60 calendar days of any change to those previously requested trip settings unless directed by the requesting Planning Coordinator or Transmission Planner that the reporting of relay setting changes is not required.
[Violation Risk Factor: Lower] [Time Horizon: Operations Planning]

C. Measures

- M1.** Each Generator Owner shall have evidence that generator frequency protective relays have been set in accordance with Requirement R1 such as dated setting sheets, calibration sheets or other documentation.
- M2.** Each Generator Owner shall have evidence that generator voltage protective relays have been set in accordance with Requirement R2 such as dated setting sheets, voltage-time curves, calibration sheets, coordination plots, dynamic simulation studies or other documentation.
- M3.** Each Generator Owner shall have evidence that it has documented and communicated any known regulatory or equipment limitations (excluding limitations noted in footnote 3) that resulted in an exception to Requirements R1 or R2 in accordance with Requirement

³ Excludes limitations that are caused by the setting capability of the generator frequency and voltage protective relays themselves but does not exclude limitations originating in the equipment that they protect.

R3 such as a dated email or letter that contains such documentation as study results, experience from an actual event, or manufacturer’s advice.

- M4.** Each Generator Owner shall have evidence that it communicated applicable generator protective relay trip settings in accordance with Requirement R4, such as dated e-mails, correspondence or other evidence and copies of any requests it has received for that information.

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Enforcement Authority

The Regional Entity shall serve as the Compliance Enforcement Authority (CEA) unless the applicable entity is owned, operated, or controlled by the Regional Entity. In such cases, the ERO or a Regional Entity approved by FERC or other applicable governmental authority shall serve as the CEA.

1.2. Data Retention

The following evidence retention periods identify the period of time an entity is required to retain specific evidence to demonstrate compliance. For instances where the evidence retention period specified below is shorter than the time since the last audit, the Compliance Enforcement Authority may ask an entity to provide other evidence to show that it was compliant for the full time period since the last audit.

The Generator Owner shall retain evidence of compliance with Requirement R1 through R4; for 3 years or until the next audit, whichever is longer.

If a Generator Owner is found non-compliant, the Generator Owner shall keep information related to the non-compliance until mitigation is complete and approved for the time period specified above, whichever is longer.

The Compliance Enforcement Authority shall keep the last audit records and all requested and submitted subsequent audit records.

1.3. Compliance Monitoring and Assessment Processes

Compliance Audit

Self-Certification

Spot Checking

Compliance Investigation

Self-Reporting

Complaint

1.4. Additional Compliance Information

None

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

2. Violation Severity Levels

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
R1	N/A	N/A	N/A	The Generator Owner that has frequency protection activated to trip a generating unit, failed to set its generator frequency protective relaying so that it does not trip within the criteria listed in Requirement R1 unless there is a documented and communicated regulatory or equipment limitation per Requirement R3.
R2	N/A	N/A	N/A	The Generator Owner with voltage protective relaying activated to trip a generating unit, failed to set its voltage protective relaying so that it does not trip as a result of a voltage excursion at the point of interconnection, caused by an event external to the plant per the criteria specified in Requirement R2 unless there is a documented and communicated regulatory or equipment limitation per Requirement R3.
R3	The Generator Owner documented the known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2 and communicated the documented limitation to its Planning Coordinator and Transmission Planner	The Generator Owner documented the known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2 and communicated the documented limitation to its Planning Coordinator and Transmission Planner	The Generator Owner documented the known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2 and communicated the documented limitation to its Planning Coordinator and Transmission Planner	The Generator Owner failed to document any known non-protection system equipment limitation that prevented it from meeting the criteria in Requirement R1 or R2. OR The Generator Owner failed to communicate

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

R #	Lower VSL	Moderate VSL	High VSL	Severe VSL
	more than 30 calendar days but less than or equal to 60 calendar days of identifying the limitation.	more than 60 calendar days but less than or equal to 90 calendar days of identifying the limitation.	more than 90 calendar days but less than or equal to 120 calendar days of identifying the limitation.	the documented limitation to its Planning Coordinator and Transmission Planner within 120 calendar days of identifying the limitation.
R4	<p>The Generator Owner provided its generator protection trip settings more than 60 calendar days but less than or equal to 90 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner provided trip settings more than 60 calendar days but less than or equal to 90 calendar days of a written request.</p>	<p>The Generator Owner provided its generator protection trip settings more than 90 calendar days but less than or equal to 120 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner provided trip settings more than 90 calendar days but less than or equal to 120 calendar days of a written request.</p>	<p>The Generator Owner provided its generator protection trip settings more than 120 calendar days but less than or equal to 150 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner provided trip settings more than 120 calendar days but less than or equal to 150 calendar days of a written request.</p>	<p>The Generator Owner failed to provide its generator protection trip settings within 150 calendar days of any change to those trip settings.</p> <p>OR</p> <p>The Generator Owner failed to provide trip settings within 150 calendar days of a written request.</p>

E. Regional Variances

None

F. Associated Documents

None

Version History


Version	Date	Action	Change Tracking
1	May 9, 2013	Adopted by the NERC Board of Trustees	
1	March 20, 2014	FERC Order issued approving PRC-024-1. (Order becomes effective on 7/1/16.)	

G. References

1. “The Technical Justification for the New WECC Voltage Ride-Through (VRT) Standard, A White Paper Developed by the Wind Generation Task Force (WGTF),” dated June 13, 2007, a guideline approved by WECC Technical Studies Subcommittee.

PRC-024 — Attachment 1

OFF NOMINAL FREQUENCY CAPABILITY CURVE

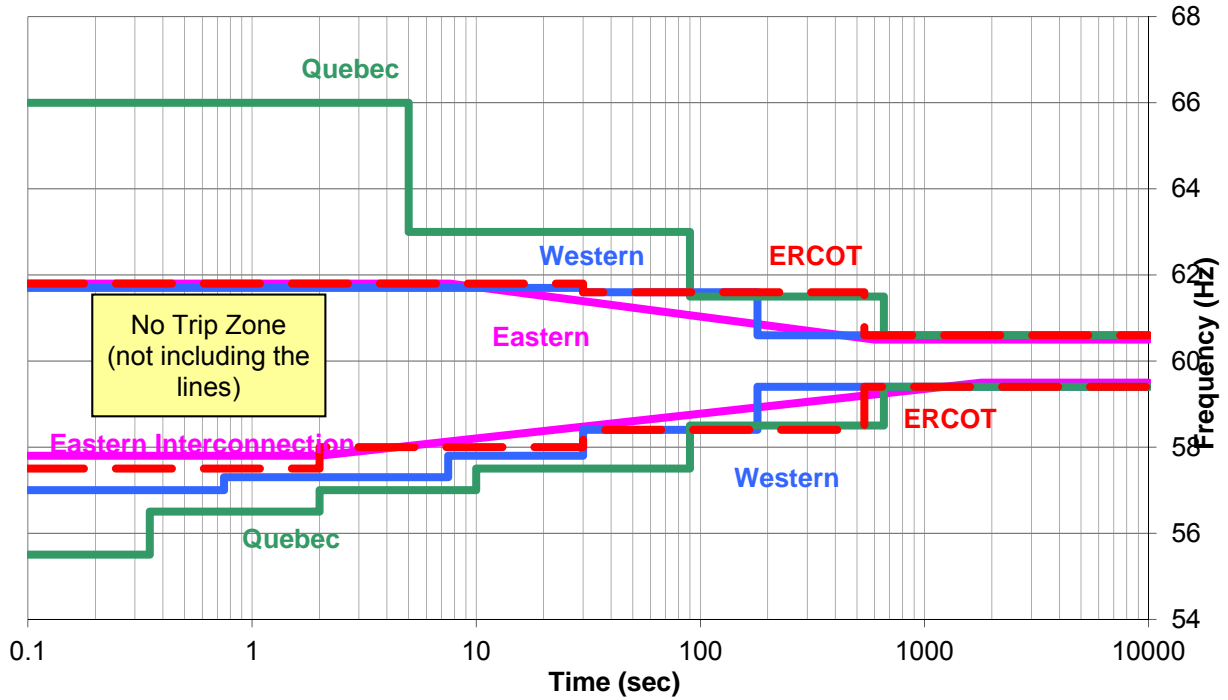

Curve Data Points:

Eastern Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (sec)
≥61.8	Instantaneous trip	≤57.8	Instantaneous trip
≥60.5	$10^{(90.935-1.45713*f)}$	≤59.5	$10^{(1.7373*f-100.116)}$
<60.5	Continuous operation	> 59.5	Continuous operation

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

Western Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (sec)
≥61.7	Instantaneous trip	≤57.0	Instantaneous trip
≥61.6	30	≤57.3	0.75
≥60.6	180	≤57.8	7.5
<60.6	Continuous operation	≤58.4	30
		≤59.4	180
		>59.4	Continuous operation


Quebec Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (Sec)
>66.0	Instantaneous trip	<55.5	Instantaneous trip
≥63.0	5	≤56.5	0.35
≥61.5	90	≤57.0	2
≥60.6	660	≤57.5	10
<60.6	Continuous operation	≤58.5	90
		≤59.4	660
		>59.4	Continuous operation

ERCOT Interconnection

High Frequency Duration		Low Frequency Duration	
Frequency (Hz)	Time (Sec)	Frequency (Hz)	Time (sec)
≥61.8	Instantaneous trip	≤57.5	Instantaneous trip
≥61.6	30	≤58.0	2
≥60.6	540	≤58.4	30
<60.6	Continuous operation	≤59.4	540
		>59.4	Continuous operation

PRC-024— Attachment 2

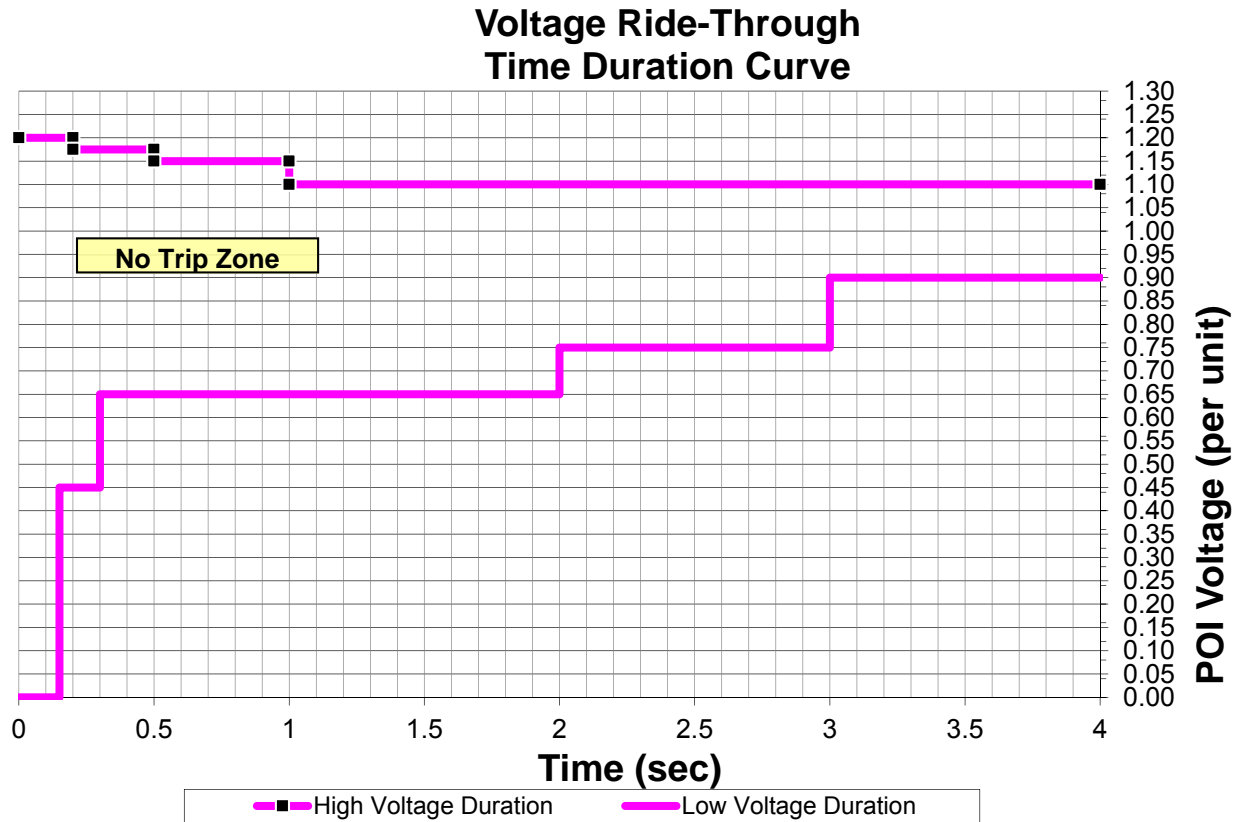

Ride Through Duration:

High Voltage Ride Through Duration		Low Voltage Ride Through Duration	
Voltage (pu)	Time (sec)	Voltage (pu)	Time (sec)
≥1.200	Instantaneous trip	<0.45	0.15
≥1.175	0.20	<0.65	0.30
≥1.15	0.50	<0.75	2.00
≥1.10	1.00	<0.90	3.00

Voltage Ride-Through Curve Clarifications

Curve Details:

1. The per unit voltage base for these curves is the nominal operating voltage specified by the Transmission Planner in the analysis of the reliability of the Interconnected Transmission Systems at the point of interconnection to the Bulk Electric System (BES).
2. The curves depicted were derived based on three-phase transmission system zone 1 faults with Normal Clearing not exceeding 9 cycles. The curves apply to voltage excursions regardless of the type of initiating event.
3. The envelope within the curves represents the cumulative voltage duration at the point of interconnection with the BES. For example, if the voltage first exceeds 1.15 pu at 0.3 seconds after a fault, does not exceed 1.2 pu voltage, and returns below 1.15 pu at 0.4 seconds, then the cumulative time the voltage is above 1.15 pu voltage is 0.1 seconds and is within the no trip zone of the curve.
4. The curves depicted assume system frequency is 60 Hertz. When evaluating Volts/Hertz protection, you may adjust the magnitude of the high voltage curve in proportion to deviations of frequency below 60 Hz.
5. Voltages in the curve assume minimum fundamental frequency phase-to-ground or phase-to-phase voltage for the low voltage duration curve and the greater of maximum RMS or crest phase-to-phase voltage for the high voltage duration curve.

Evaluating Protective Relay Settings:

1. Use either the following assumptions or loading conditions that are believed to be the most probable for the unit under study to evaluate voltage protection relay setting calculations on the static case for steady state initial conditions:
 - a. All of the units connected to the same transformer are online and operating.
 - b. All of the units are at full nameplate real-power output.
 - c. Power factor is 0.95 lagging (i.e. supplying reactive power to the system) as measured at the generator terminals.
 - d. The automatic voltage regulator is in automatic voltage control mode.
2. Evaluate voltage protection relay settings assuming that additional installed generating plant reactive support equipment (such as static VAr compensators, synchronous condensers, or capacitors) is available and operating normally.
3. Evaluate voltage protection relay settings accounting for the actual tap settings of transformers between the generator terminals and the point of interconnection.

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

Appendix QC-PRC-024-1

Provisions specific to the standard PRC-024-1 applicable in Québec

This appendix establishes specific provisions for the application of the standard in Québec. Provisions of the standard and of its appendix must be read together for the purposes of understanding and interpretation. Where the standard and appendix differ, the appendix shall prevail.

A. Introduction

1. **Title:** Generator Frequency and Voltage Protective Relay Settings

2. **Number:** PRC-024-1

3. **Purpose:** No specific provision

4. **Applicability:**

Functions

No specific provision

Facilities

The standard only applies to the facilities of the Main Transmission System (RTP).

5. **Effective Date:**

5.1. Adoption of the standard by the Régie de l'énergie: September 27, 2017

5.2. Adoption of the appendix by the Régie de l'énergie: September 27, 2017

5.3. Effective date of the standard and its appendix in Québec: October 1st, 2017

IMPLEMENTATION PLAN FOR PRC-024-1 STANDARD

Requirements	Applicability	Date of enforcement in Québec
Toutes	At least 40% of applicable facilities	October 1 st , 2018
	At least 60% of applicable facilities	October 1 st , 2019
	At least 80% of applicable facilities	October 1 st , 2020
	100% of applicable facilities	October 1 st , 2021

B. Requirements

Specific provision for Requirement 1 : Wind, thermal and photovoltaic generation plants, as well as generating plants with asynchronous generating units must respect the curves in Appendix as per requirement 1, but they may trip when the frequency ≥ 61.7 Hz.

Specific provision for Requirement 2:

For Main Transmission System (RTP) generating facilities (including step-up transformers) connected to the RTP, references to “PRC-024 Attachment 2” are replaced by “Attachment 2 of the Québec Appendix to PRC-024-1”.

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

Appendix QC-PRC-024-1

Provisions specific to the standard PRC-024-1 applicable in Québec

For Main Transmission System (RTP) generating facilities (including step-up transformers) not connected to the RTP, references to “PRC-024 Attachment 2” are replaced by “Attachment 3 of the Québec Appendix to PRC-024-1”.

C. Measures

No specific provision

D. Compliance

1. Compliance Monitoring Process

1.1. Compliance Monitoring Authority

The Régie de l'énergie is responsible, in Québec, for compliance monitoring with respect to the reliability standard and its appendix that it adopts.

1.2. Data Retention

No specific provision

1.3. Compliance Monitoring and Assessment Processes:

No specific provision

1.4. Additional Compliance Information

No specific provision

2. Violation Severity Levels

No specific provision

E. Regional Variances

No specific provision

F. Associated Document

No specific provision

G. References


No specific provisions

PRC-024-1 — Attachment 1

No specific provision

PRC-024-1 — Attachment 2

Voltage Ride-Through Time Duration Curve at Québec

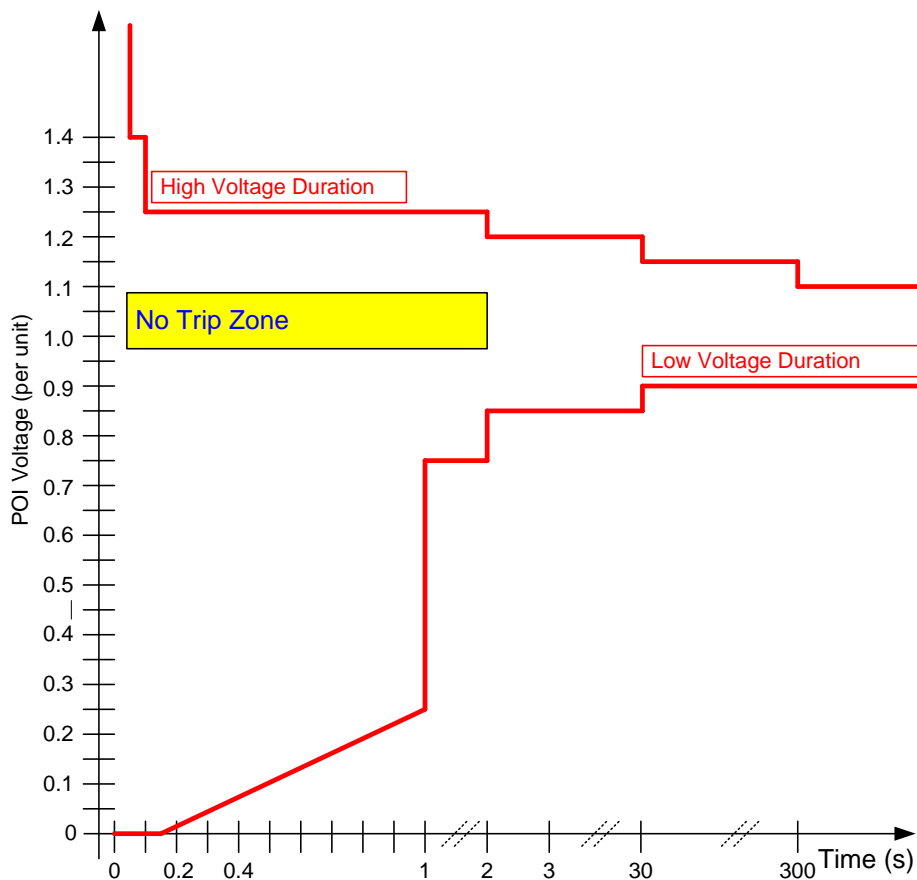


Ride Though Duration :

High Voltage Ride Through Duration		Low Voltage Ride Through Duration	
Voltage (pu)	Duration (sec)	Voltage (pu)	Duration (sec)
> 1.4	0.033	$.9 \leq V \leq 1.10$	Permanent
$1.25 < V \leq 1.40$ (note 2)	0.10	$.85 \leq V < .9$	30
$1.20 < V \leq 1.25$	2.0	$.75 \leq V < .85$	2.0
$1.15 < V \leq 1.20$	30	$.25 \leq V < .75$	1.0
$1.10 < V \leq 1.15$	300	$0 \leq V < .25$ (note 1)	0.15

Note 1. For the voltage range between 0 and .25 pu, wind farms should respect the minimal duration calculated as following : $D = 3.4V + 0,15$, where D is the duration in second and V is the voltage in pu.

Note 2. Facilities that use power electronics must remain operational throughout the entire voltage range except for voltage level greater than 1.25 pu where temporary blocking is allowed.

PRC-024-1 — Attachment 3

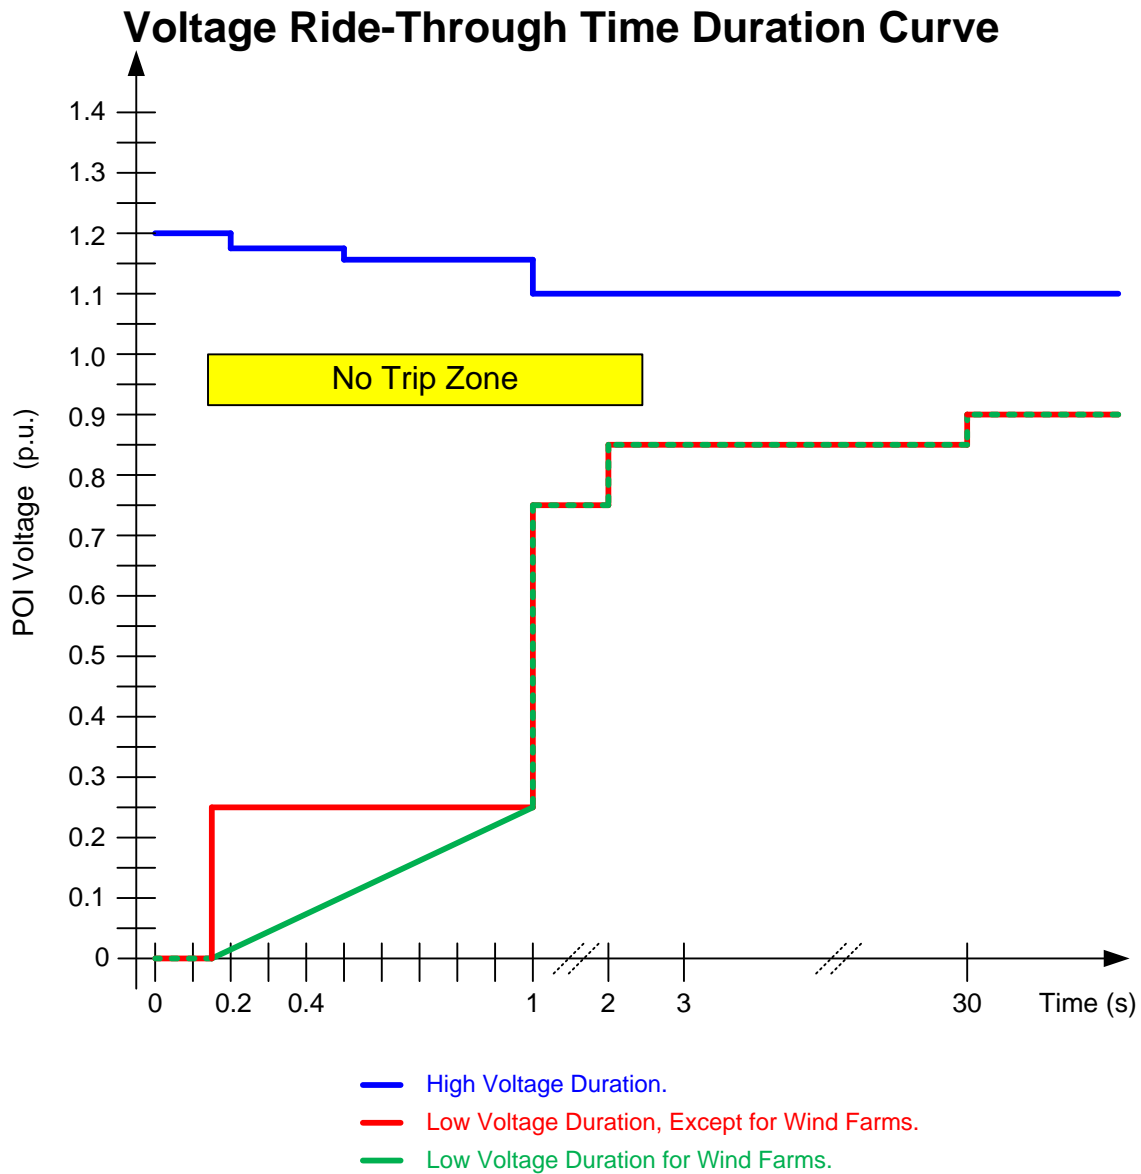

Standard PRC-024-1 — Generator Frequency and Voltage Protective Relay Settings

Appendix QC-PRC-024-1

Provisions specific to the standard PRC-024-1 applicable in Québec

Ride Though Duration :

High Voltage Ride Through Duration		Low Voltage Ride Through Duration	
Voltage (pu)	Duration (sec)	Voltage (pu)	Duration (sec)
$\geq 1,200$	Instantaneous trip	$.9 \leq V \leq 1.10$	Permanent
$\geq 1,175$	0,2	$.85 \leq V < .9$	30
$\geq 1,15$	0,5	$.75 \leq V < .85$	2.0
$\geq 1,10$	1,00	$.25 \leq V < .75$	1.0
		$0 \leq V < .25$ (note 1)	0.15

Note 1. For the voltage range between 0 and .25 pu, wind farms should respect the minimal duration calculated as following : $D = 3,4V + 0,15$, where D is the duration in second and V is the voltage in pu.

Revision History

Revision	Date	Action	Change Tracking
0	September 27, 2017	New appendix	New